



Setup Guide

HU-318



CONTENTS

1. Setup HU-318

1.1	Obtain the IP address of HU-318.....	3
1.2	Login HU-318 Main Page.....	4
1.3	HU-318 Network Setting.....	5
1.4	Setup Portforward.....	6


2. Setup App

2.1	App Download.....	7
2.2	App Network Settings.....	8
2.3	Zone Settings.....	9
2.4	Device Settings.....	10
2.5	Scene Settings.....	11
2.6	Timer Settings.....	14


3. Operation..... 17

4. Putting Receiver into Programming Mode..... 18


1. Connect the ethernet cable to the HU-318 hub and to your router

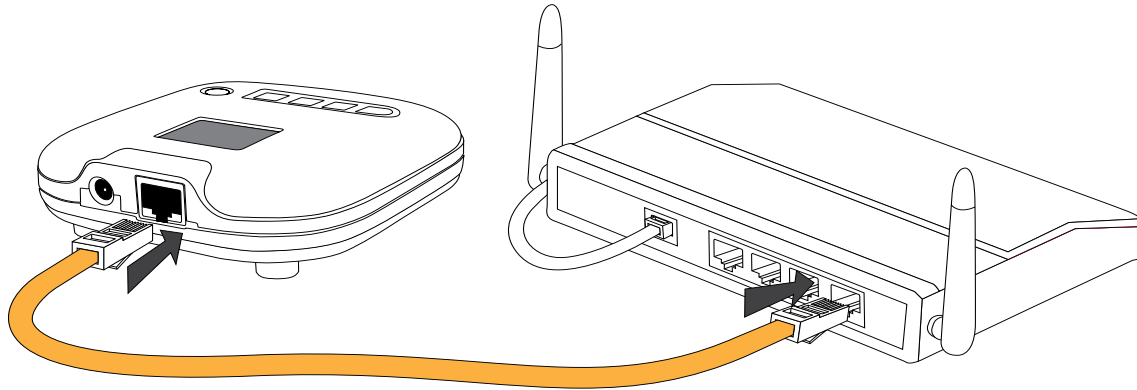


2. Connect the power adaptor to the outlet and to the HU-318 hub

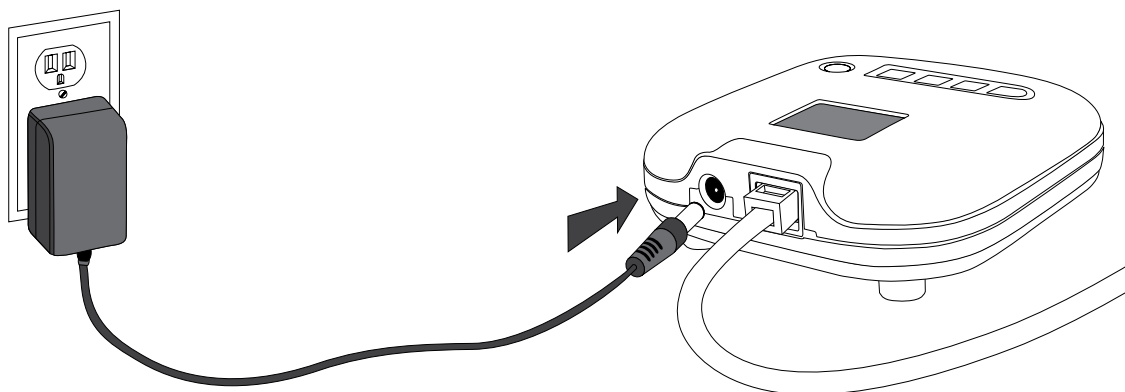

3. You will see your IP address as well as the port number on the HU-318 > **192.168.x.xx:8081**

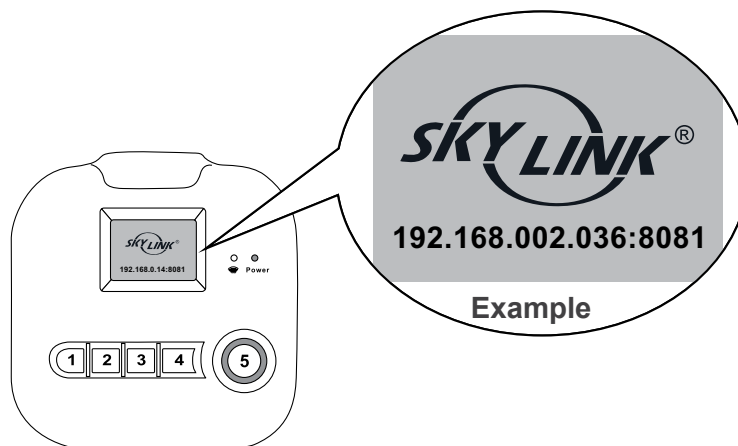

1. Open the browser on your desktop and input your IP address
http://192.168.x.xx:8081

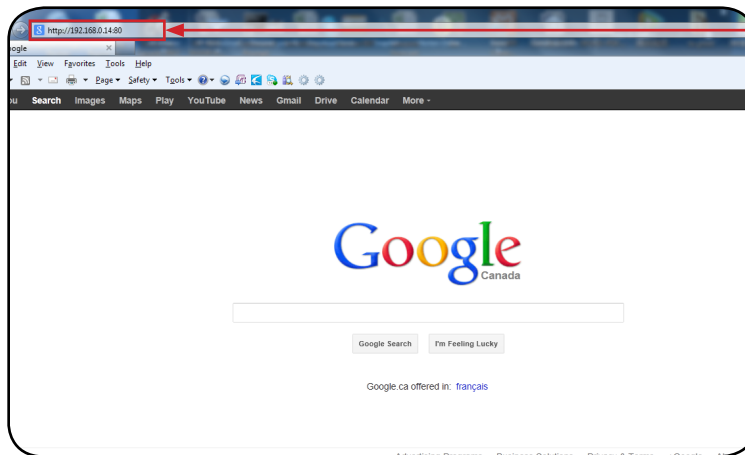

Omit the zeros from your IP address shown on the hub to the following format:


example

http:192.168.002.036:8081 **X**

to

http:192.168.2.36:8081 **✓**


2. Input the default user name **admin** and default password **admin**

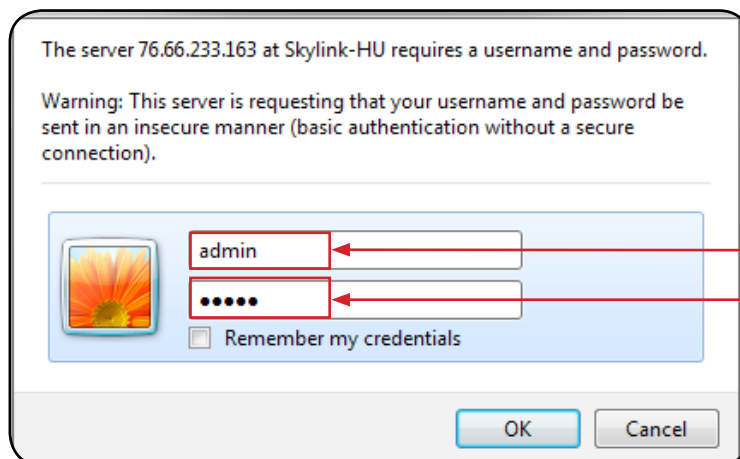


admin

admin

3. Click on **“Settings”** icon

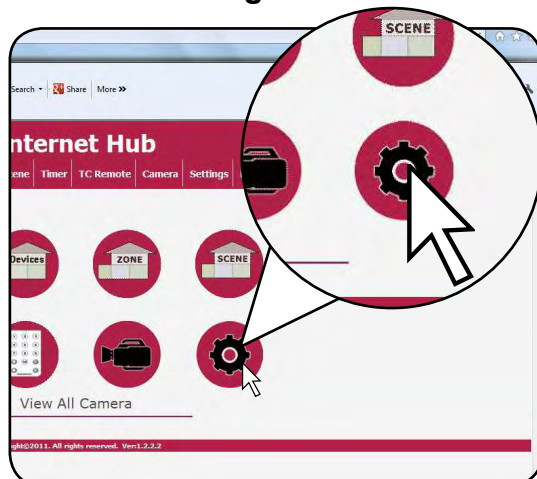


4. Scroll down and click on **“Network Settings”**

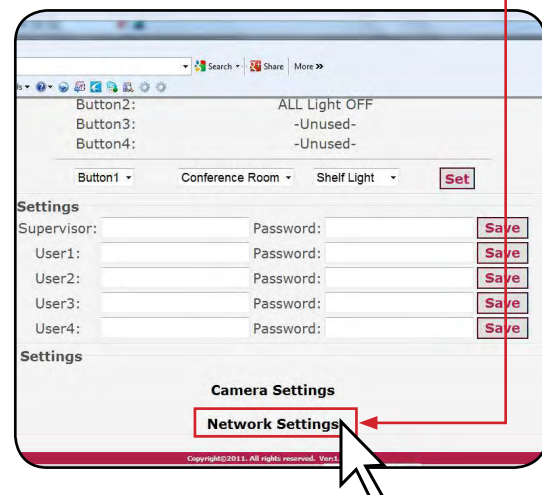


1. Ensure the DDNS Status is **OK**.
If it states **Fail**, Check your internet access



2. Uncheck the DHCP Client and Click on “Save Config”

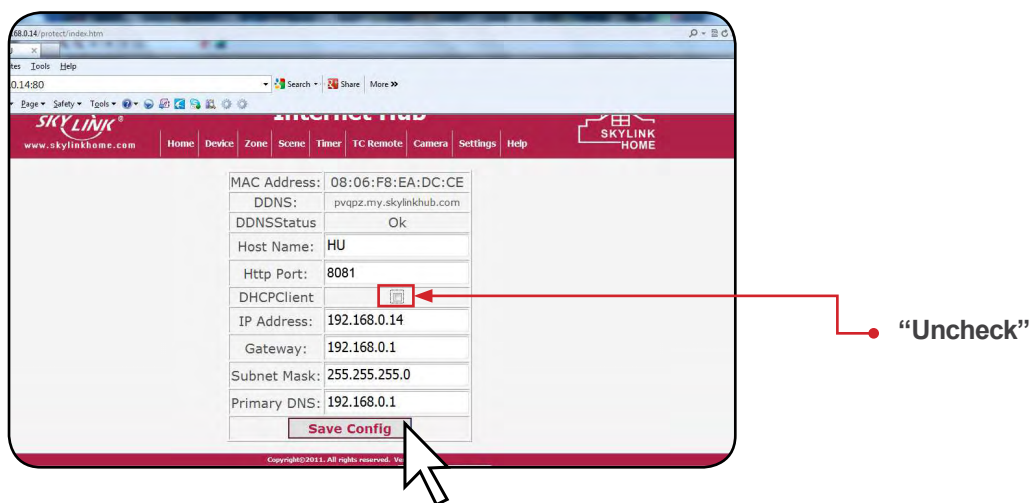

3. Now the HU-318 is rebooting

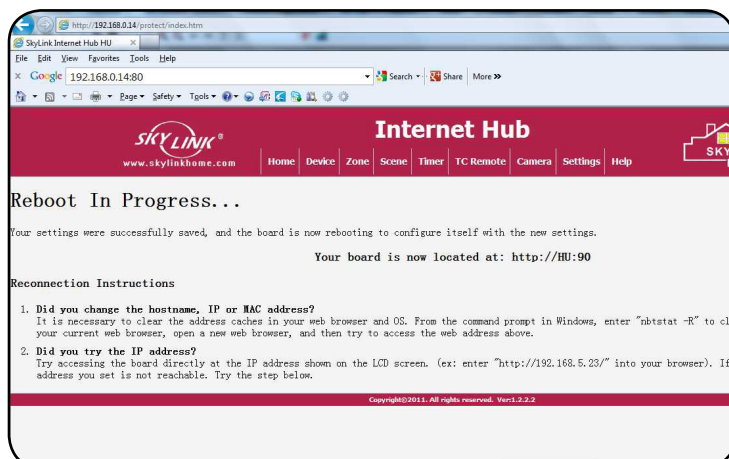



If you want to control your devices/appliances outside your wifi-network, you need to set up **PORT FORWARDING** on your Router!

To do this visit <http://www.portforward.com> and enter the router brand and model found at the back of your router, into the search engine.


On the returned page, click on the hyperlink “Default Guide” and follow the step by step guide.

2.1 APP DOWNLOAD

SETUP APP




1. On your **iphone**, go to the App Store, and search “**skylink homecontrol**”

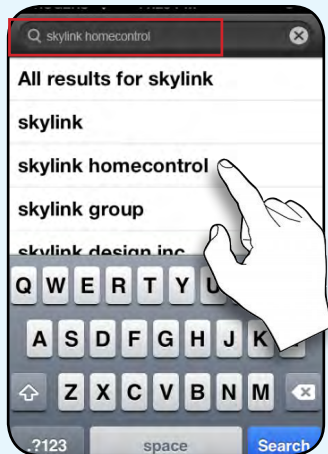


2. Install the Skylink App




3. Run the App

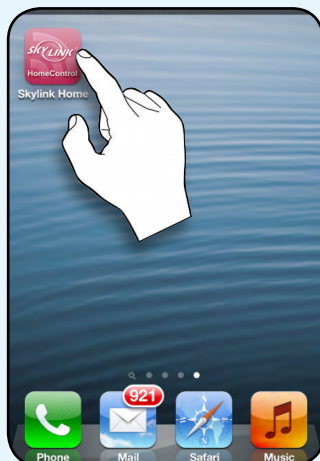


1. On your **smartphone**, go to the App Store, and search “**skylink home**”

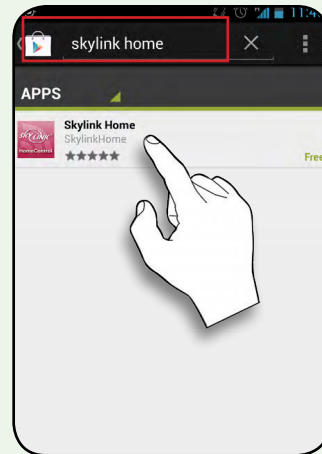

2. Install the Skylink App

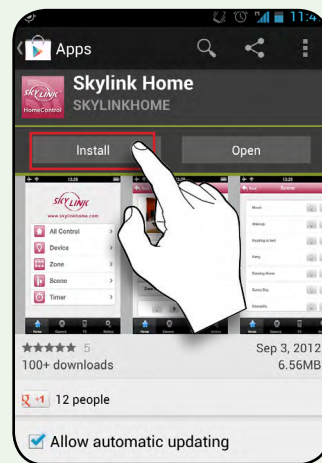

3. Run the App

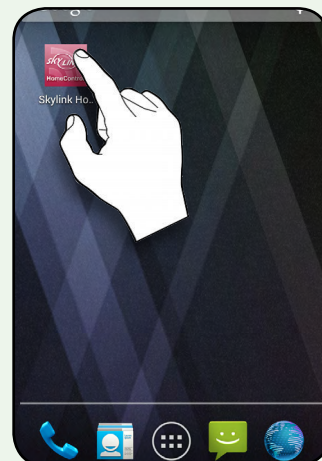

2.2 APP NETWORK SETTINGS

1. Tap on “Settings”




2. Tap on “Network Settings”



3. Tap on “1”



4. Enter the following information:

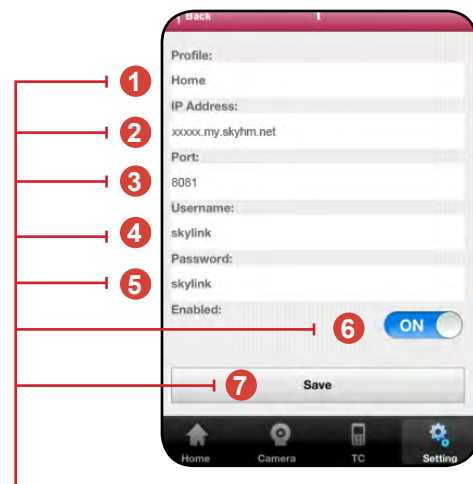

5. Tap on “Back”




1. Profile: **Home**
2. IP Address: **xxxxx.my.skyhm.net**
or
192.168.x.xx (If you didn't setup DDNS)
3. Port: **8081**
4. User name: **admin**
5. Password: **admin**
6. Enabled: **ON**
7. Tap “Save”


1. Tap on **"Zone Settings"**




2. Tap on one of the **"Unused"** buttons

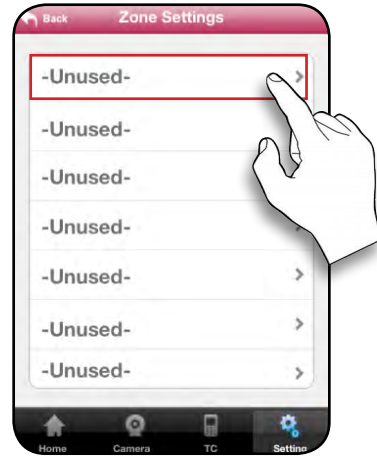


3. Enter Your Zone Name:
eg. **Master Room**
and Tap on **"Rename"**

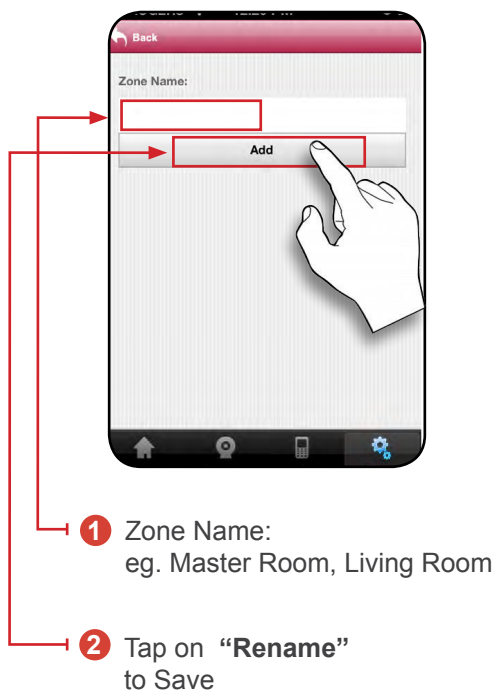


4. Tap on **"Back"**

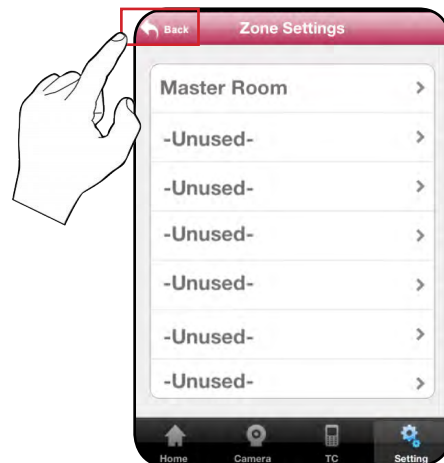

1. Tap on
“**Device Settings**”

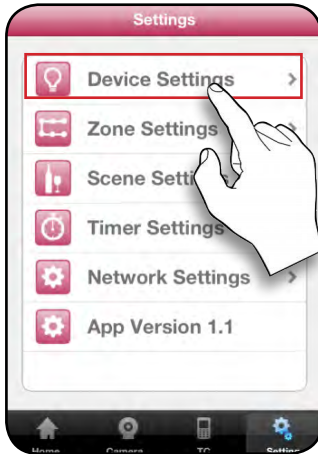

2. Tap on
your zone

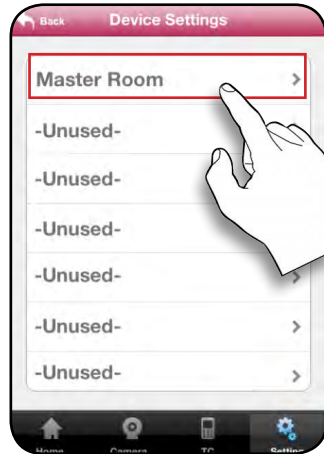


3. Tap on one of the
“**Unused**” buttons




4. Enter Your Device Name and
Tap on “**Return**”




5. Select either ON/OFF or
No-Dim/Dim and tap on “**Add**”

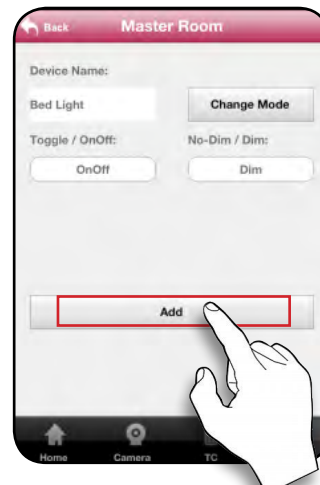

6. Tap on the Button you created

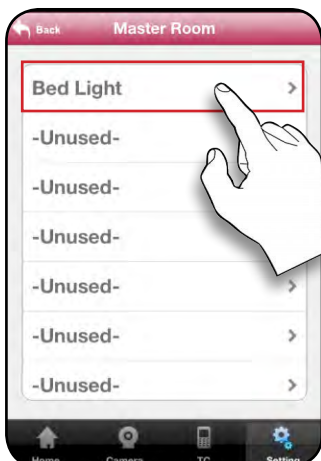

7. Put your skylink receiver into
programming mode and Tap on “**Learn**”

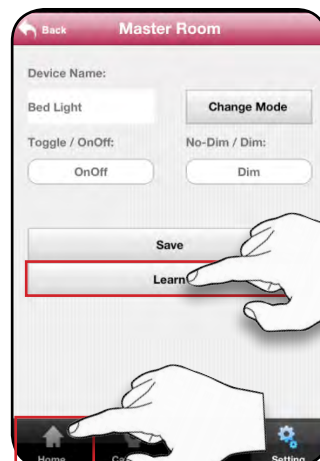

To set your skylink receiver into programming mode please refer to [page 18](#) of this guide.

After Programmed,
Tap on “**Home**”

1. Tap on **"Settings"**




2. Tap on **"Scene Settings"**




3. Tap on one of the **"Unused"** buttons




4. Enter your Scene Name and tap **"Rename"**

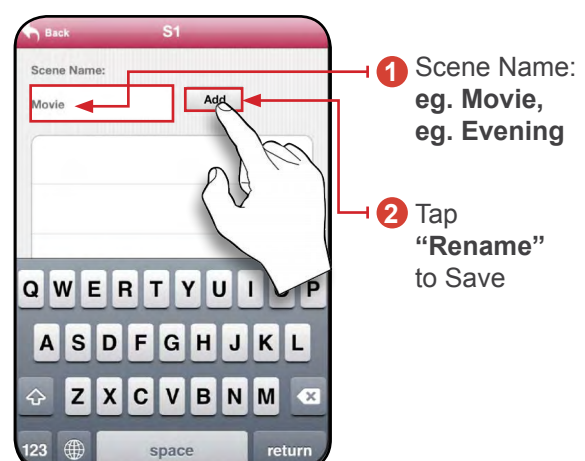

5. Tap on your **"Scene Name: eg.Movie"**

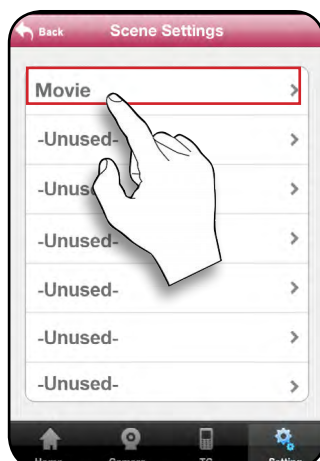

6. Tap on **"Zone"**

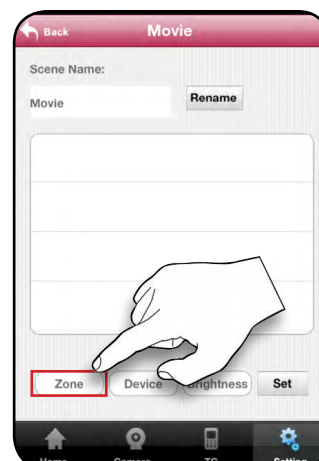


7. Select your zone name


Tap **"Done"**




8. Tap on **"Device"**

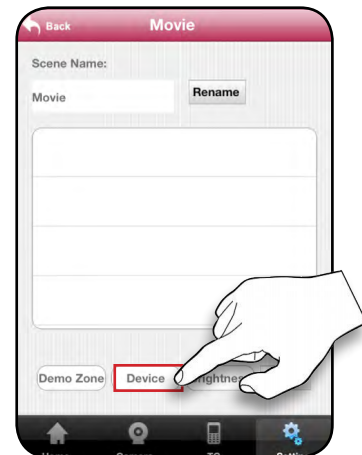

9. Select your Device, and Tap **"Done"**

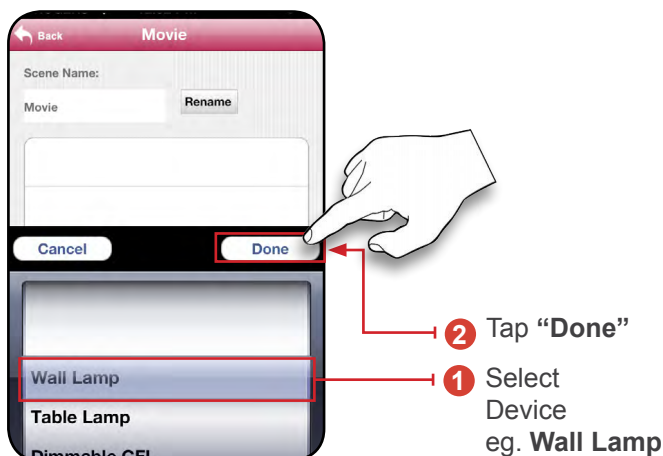


10. Tap on **"Brightness"**

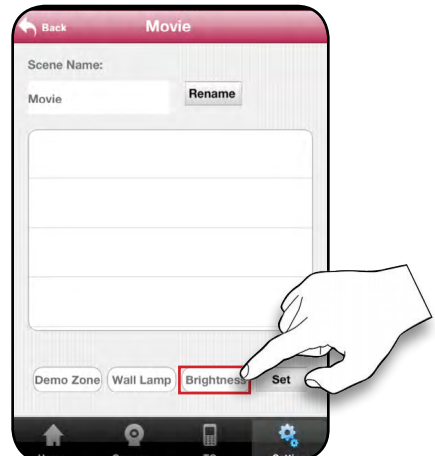


11. Select **"% Brightness"**


Tap **"Done"**

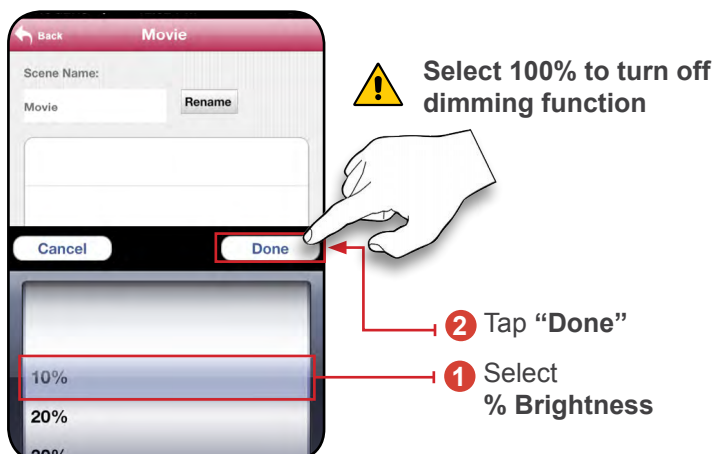

12. Tap on **"Set"**

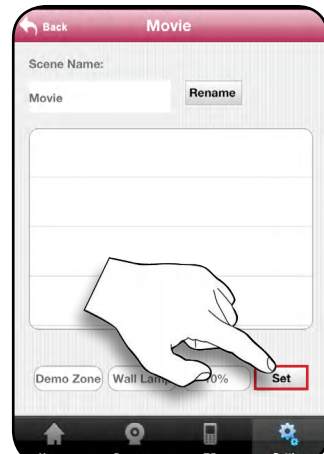

13. Set your Device into programming mode and Tap **“Learn”** to program

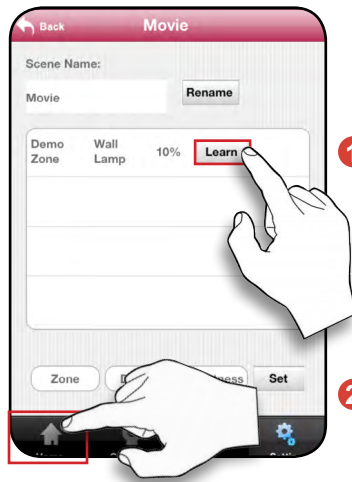

1 Tap on **“Learn”**

2 After Programmed, Tap on **“Home”**




To set your skylink receiver into programming mode please refer to [page 18](#) of this guide.


14. To add more devices to the same scene, repeat scene settings: **steps 5-13**
15. Tap on **“Scene”**




16. Tap icons to control the device, ON/OFF switch

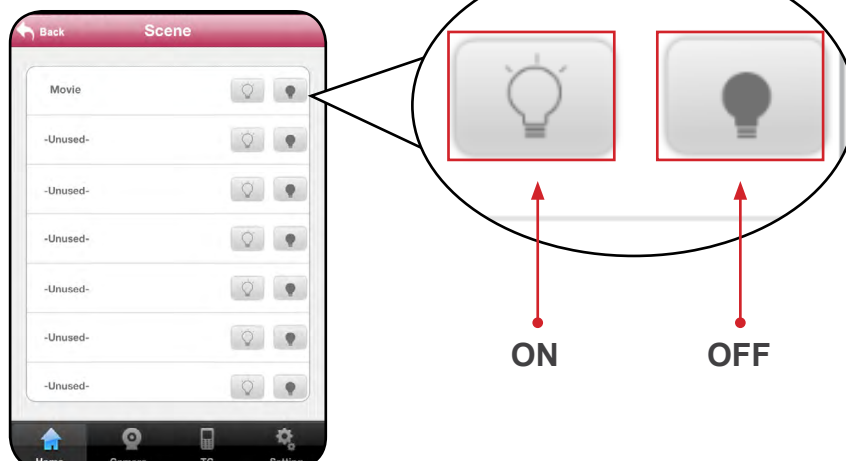

1. Tap on **“Settings”**

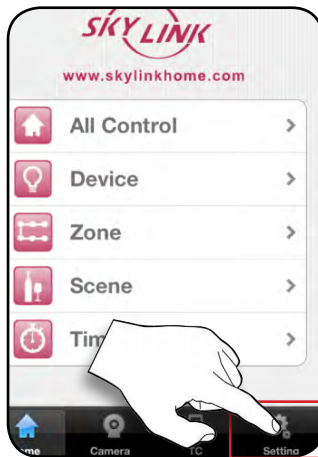


2. Tap on **“Timer Settings”**

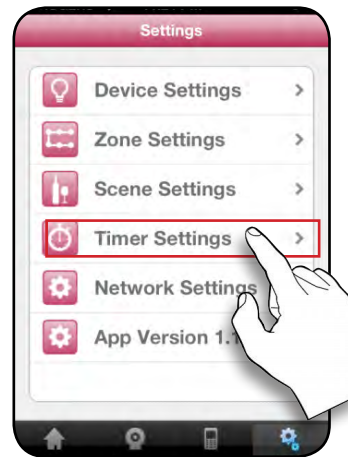

3. Tap one of the **“Unused”** buttons




4. Enter your Timer Name

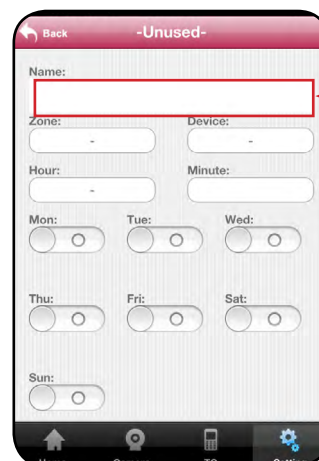


Timer Name:
eg. **Timer1**
eg. **Night**

5. Tap on **“Return”** to Save the name

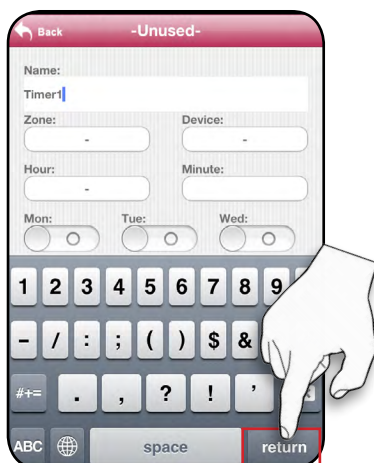


6. Tap on **“Zone”**, Select your zone and Tap **“Done”** to save

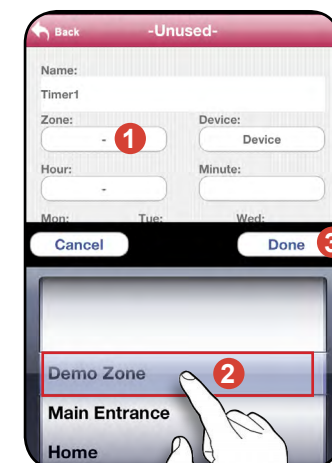


1. Tap **“Zone”**
2. Select from list
3. Tap **“Done”** to Save

7. Tap “Device”

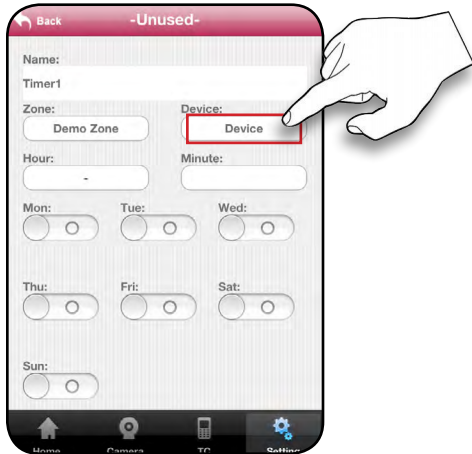


8. Tap Device, Select your Device from the List and Tap “Done” to Save

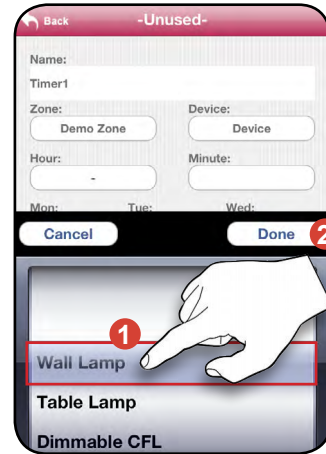


1. Select Device: eg. Wall Lamp
2. Tap “Done” to Save

9. Tap Hour, Select your Hour from the List and Tap “Done” to Save

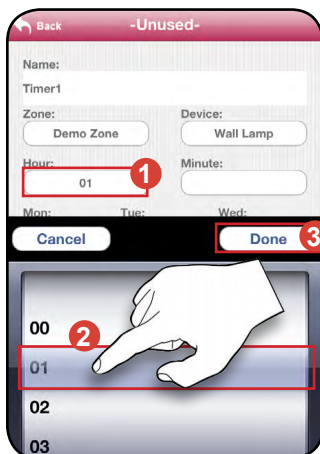

1. Tap Hour
2. Tap to Select Hour amount: eg.01
3. Tap “Done” to Save

10. Tap Minute, Select your Minute from the List, Tap “Done” to Save

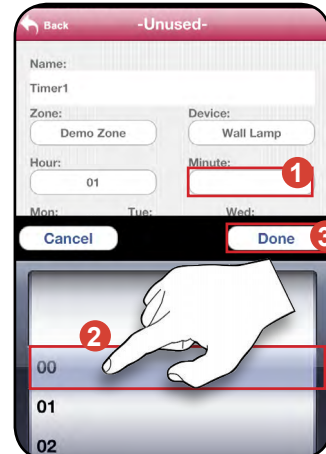


1. Tap Minute
2. Tap to Select Minute amount: eg.00
3. Tap “Done” to Save

11. Slide to activate/deactivate the Days



12. Tap on the “On/Off” button to program your action

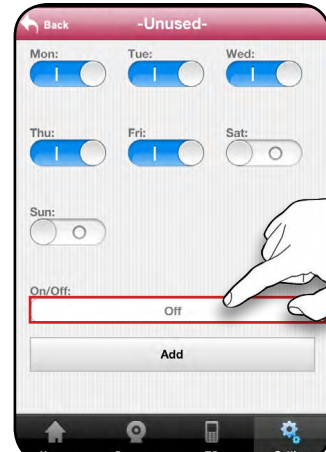


13. Tap on “On” or “Off” depending on your desired action




1. Select “On” or “Off”
2. Tap “Done” to Save


14. Tap on the “Add” button to add your timer

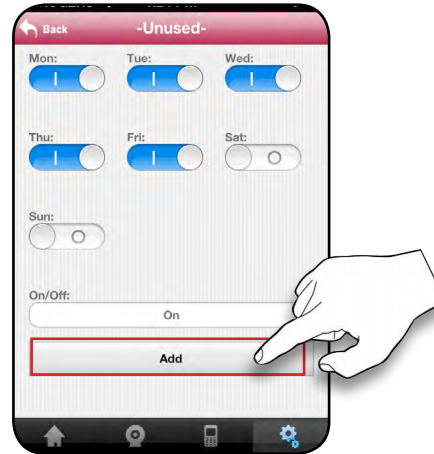


15. Tap on your Timer name

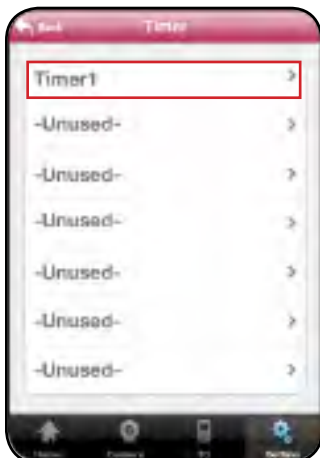

16. Tap on **Activate Icon**

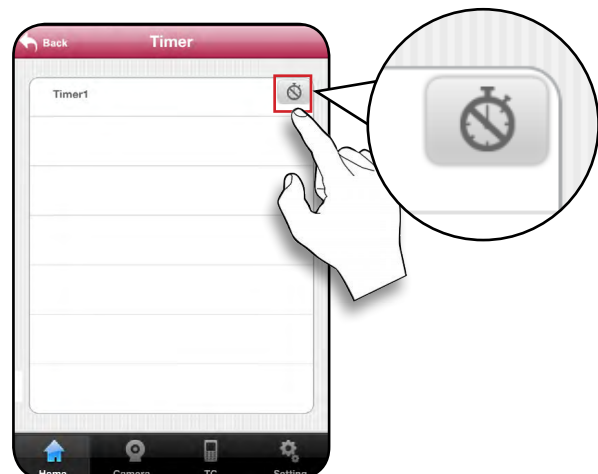

17. Timer is now active

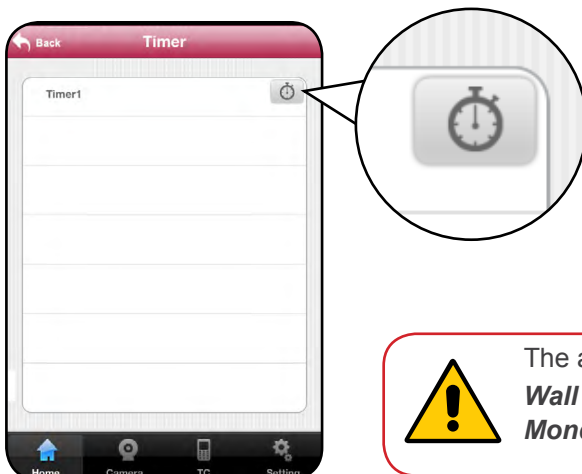


The above example now has **Timer1** Set for:
Wall Lamp to turn ON in Demo Zone,
Monday-Fridays at 1:00am

OPERATION


1. Tap on the “Zone” button



3. Tap on the Zone you want to control

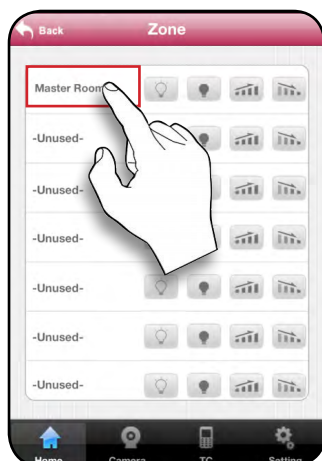

4. Tap on the device you want to control and use the **4 buttons** below to control

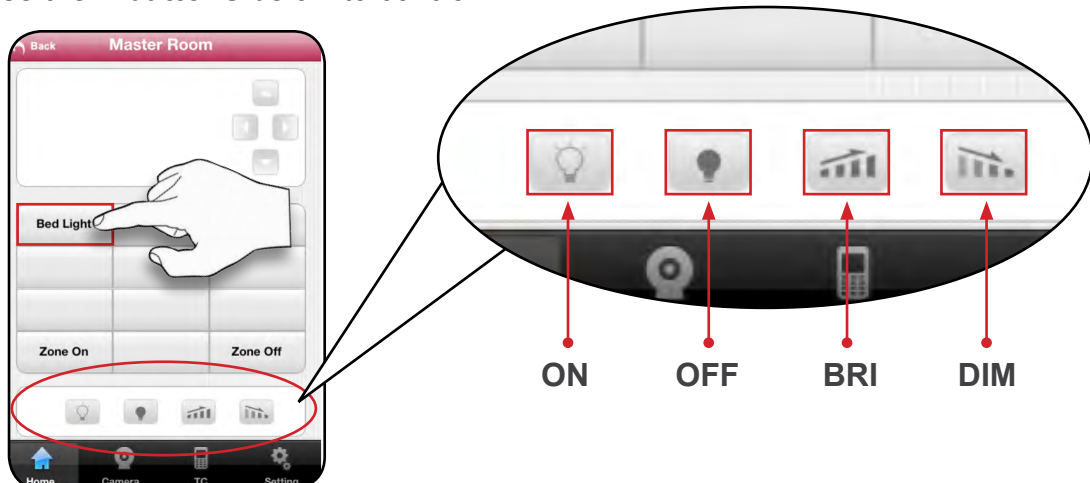

PUTTING RECEIVER INTO PROGRAMMING MODE

Mini Screw-In Dimmer **Model: LS-318**

Start with dimmer off. Position the slide switch to the desired operating mode. Power on (by turning on the light switch or the circuit breaker). The LED will flash quickly for Regular On/Off mode, slowly for Flashing Alert mode or will be solid for Countdown Timer mode. LS-318 is now in programming mode and will stay that way for 15 seconds.

On/Off & Dimming Control **Model: MD-318**

Start with dimmer off; Power on the dimmer (by turning on light switch or the circuit breaker), you will hear a beep from the MD-318 indicating unit is now in programming mode and will stay that way for 15 seconds.

Mini Screw-In Dimmer **Model: LX-318**

Start with dimmer off. Power on the unit by turning on the light switch or the circuit breaker. You will hear a beep. LX is now in programming mode and will stay that way for 15 seconds.

On/Off Control **Model: MR-318**

Start with unit powered off. Power on the unit by turning on the light switch or the circuit breaker. You will hear a beep from the On/Off control which indicates the unit is in programming mode and will stay that way for 15 seconds.

Indoor/Outdoor Plug-In On/Off Control **Model: PA-318**

On-Off/Countdown Timer Mode:

Start with the load turned off. Press and hold the 'SET' button; Red LED will flash quickly (release for On/Off mode) and then it will stay on solid (release for Countdown Timer mode)

Wireless Wall Switch **Model: WE-318/WR-318**

On-Off/Countdown

Timer/ Flashing Alert Mode:

Start with the load turned on. Press and hold 'SET' button; Blue LED's will flash quickly (release for On/Off mode), then slowly (release for Flashing Alert mode- only the WR-001 has this feature) and then it will be solid (release for Countdown Timer mode).

Plug-In Dimmers **Model: PL-318/PR-318 (repeater)** **PR-318S (repeater for security)**

On-Off/Countdown

Timer/ Flashing Alert Mode:

Start with the load turned off. Press and hold 'SET' button; Red LED will flash quickly (release for On/Off mode), then slowly (release for Flashing Alert mode) and then it will be solid (release for Countdown Timer mode).

Garage Door Smart Button **Model: GB-318**

Press and hold the black learn button (right side of the unit) for approx. 3 seconds. The LED light will start to blink faster. Immediately let go and transmit the learn code from your transmitter



Wireless Control Everywhere.